



DESCRIPTION CONTROL		
REV	DESC	DATE

ECON NO

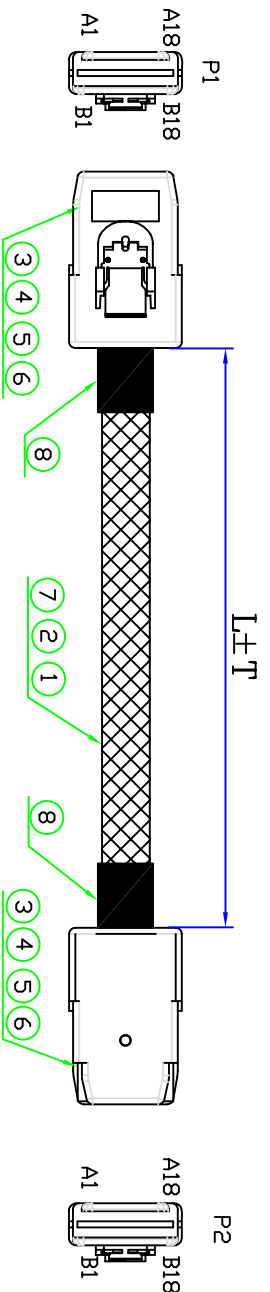

TEST:
 1.OPEN / SHORT 100% TEST,
 2.CONTACT RESISTANCE : 1.0Ω(MAX),
 3. INSULATION RESISTANCE : 20MΩ (MIN),
 4.HI-POT : DC 300V /0.01S.

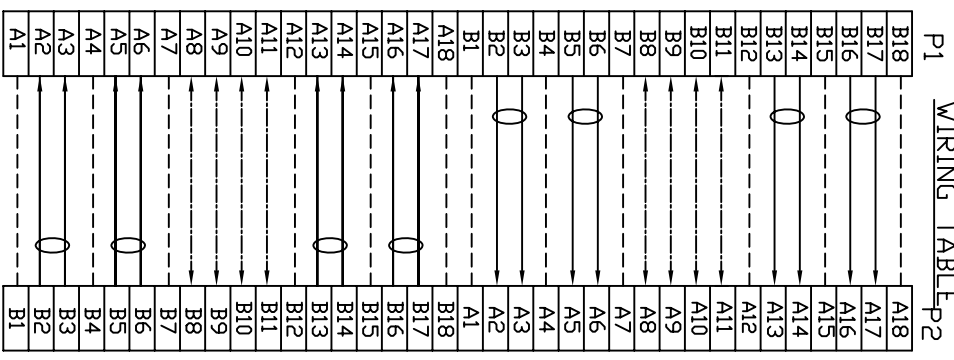

*	PE BAG : 3'×28'×0.06mm	1	PCS
9	MINI SAS 36P DUSTPROOF COVER	2	PCS
8	Adhesive Heat Shrink Tube DD:15.0mm	15*2	mm
7	NYLON BRAID W=10.0MM <BLACK> 1*72	540	mm
6	LATCH	2	PCS
5	PE	4	G
4	PP BK	8	G
3	MINI SAS 36P PCB	2	PCS
2	30#*8C DD:3.0mm BK	533	mm
1	(2C*30#+AL+2D)*2C 1.85*5.8 PANTON 200C UL2863 RED	530	mm
NO.	DESCRIPTION	Q'TY	UNIT

公差Tolerance:

0-10=±0.10
 10-40=±0.25
 51-99=±0.40

品名Title: Mini SAS 36P CABLE

鴻浩企業有限公司
 HUNG HOW ENTERPRISE CO., LTD.
 TEL: 2-2687-0029 FAX: 2-2687-0035

TRAFFIC NO.:	CXL	SCALE:	1:1	PAGE:	1 OF 1
CHECK EDRY:		NO:		DATE:	07-01-11
SIZE: A4	UNIT: MM	三角投影法			